

Product Change Notice (PCN)

Date: 11/16/2022

PCN Number: PCN-0450001R-01

To Our Customers:

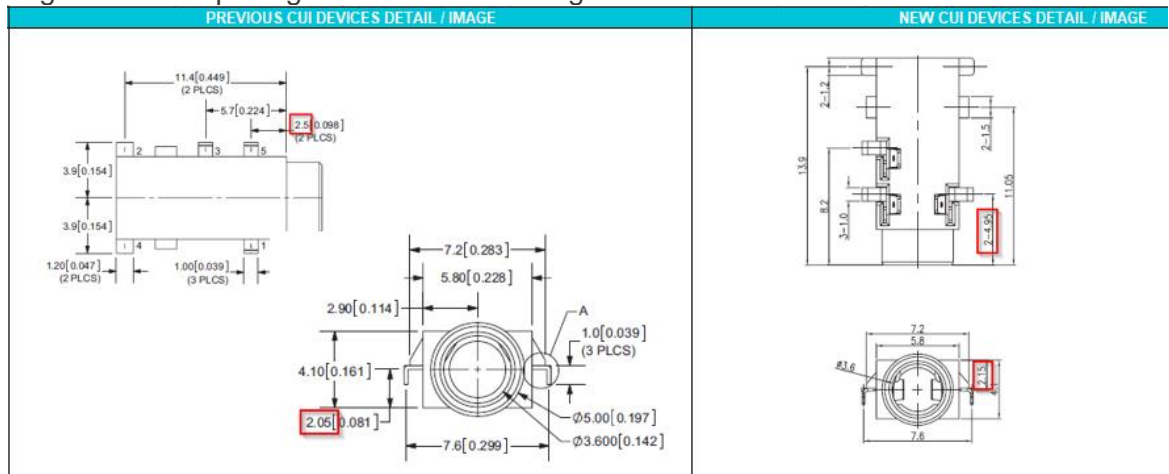
We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected:
SJ-3501-SMT-TR

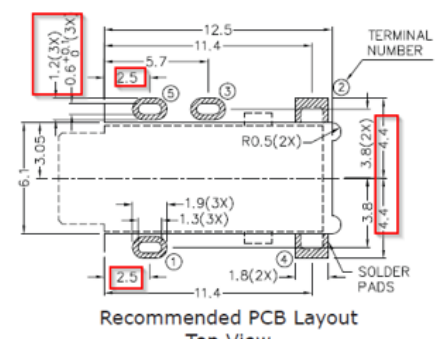

Reason(s) for Change: *Manufacturing process improvements*

Description of Change:

1. Slight terminal spacing difference 0.1mm higher





2. PCB pad/hole size differs

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE
 <p>Recommended PCB Layout Top View</p>	 <p>Recommended PCB Layout Top View</p>

3. Housing material differs

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE																																										
<table border="1"> <thead> <tr> <th></th> <th>MATERIAL</th> <th>PLATING</th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>copper alloy</td> <td>gold flash</td> </tr> <tr> <td>terminal 2</td> <td>copper alloy</td> <td>gold flash</td> </tr> <tr> <td>terminal 3</td> <td>copper alloy</td> <td>gold flash</td> </tr> <tr> <td>terminal 4</td> <td>copper alloy</td> <td>gold flash</td> </tr> <tr> <td>terminal 5</td> <td>copper alloy</td> <td>gold flash</td> </tr> <tr> <td>plastic</td> <td>PA6T or equivalent</td> <td></td> </tr> </tbody> </table>		MATERIAL	PLATING	terminal 1	copper alloy	gold flash	terminal 2	copper alloy	gold flash	terminal 3	copper alloy	gold flash	terminal 4	copper alloy	gold flash	terminal 5	copper alloy	gold flash	plastic	PA6T or equivalent		<table border="1"> <thead> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>PLATING/COLOR</th> </tr> </thead> <tbody> <tr> <td>terminal 1</td> <td>copper alloy t=0.20</td> <td>gold flash over nickel</td> </tr> <tr> <td>terminal 2</td> <td>copper alloy t=0.20</td> <td>gold flash over nickel</td> </tr> <tr> <td>terminal 3</td> <td>copper alloy t=0.20</td> <td>gold flash over nickel</td> </tr> <tr> <td>terminal 4</td> <td>copper alloy t=0.20</td> <td>gold flash over nickel</td> </tr> <tr> <td>terminal 5</td> <td>copper alloy t=0.20</td> <td>gold flash over nickel</td> </tr> <tr> <td>housing</td> <td>PAST (UL94V-0)</td> <td>black</td> </tr> </tbody> </table>	DESCRIPTION	MATERIAL	PLATING/COLOR	terminal 1	copper alloy t=0.20	gold flash over nickel	terminal 2	copper alloy t=0.20	gold flash over nickel	terminal 3	copper alloy t=0.20	gold flash over nickel	terminal 4	copper alloy t=0.20	gold flash over nickel	terminal 5	copper alloy t=0.20	gold flash over nickel	housing	PAST (UL94V-0)	black
	MATERIAL	PLATING																																									
terminal 1	copper alloy	gold flash																																									
terminal 2	copper alloy	gold flash																																									
terminal 3	copper alloy	gold flash																																									
terminal 4	copper alloy	gold flash																																									
terminal 5	copper alloy	gold flash																																									
plastic	PA6T or equivalent																																										
DESCRIPTION	MATERIAL	PLATING/COLOR																																									
terminal 1	copper alloy t=0.20	gold flash over nickel																																									
terminal 2	copper alloy t=0.20	gold flash over nickel																																									
terminal 3	copper alloy t=0.20	gold flash over nickel																																									
terminal 4	copper alloy t=0.20	gold flash over nickel																																									
terminal 5	copper alloy t=0.20	gold flash over nickel																																									
housing	PAST (UL94V-0)	black																																									

4. Reflow Soldering Difference

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE																																				
<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>ref storage</td> <td>at relative humidity <80%</td> <td></td> <td></td> <td>40</td> <td>°C</td> </tr> <tr> <td>reflow soldering¹</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td>265</td> <td>°C</td> </tr> </tbody> </table> <p>drying conditions²</p> <p>parts in reel: bake at 40°C ±5°C for 72 hours parts removed from reel: bake at 40°C ±5°C for 10 hours</p> <p>Notes:</p> <ol style="list-style-type: none"> Must reflow solder within 72 hours from opening vacuum packaging at a temperature <30°C & relative humidity <60%. When exceeding floor life by >72 hours. 	parameter	conditions/description	min	typ	max	units	ref storage	at relative humidity <80%			40	°C	reflow soldering ¹	see reflow profile	255	260	265	°C	<p>SOLDERABILITY</p> <table border="1"> <thead> <tr> <th>parameter</th> <th>conditions/description</th> <th>min</th> <th>typ</th> <th>max</th> <th>units</th> </tr> </thead> <tbody> <tr> <td>ref storage</td> <td>5-25°C, 20-75% humidity</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>reflow soldering</td> <td>see reflow profile</td> <td>255</td> <td>260</td> <td></td> <td>°C</td> </tr> </tbody> </table> <p>Notes:</p> <ol style="list-style-type: none"> CUI Devices recommends usage of the product within 24 hours after 100 is opened. After 24 hours, CUI Devices recommends drying the parts prior to use. 	parameter	conditions/description	min	typ	max	units	ref storage	5-25°C, 20-75% humidity					reflow soldering	see reflow profile	255	260		°C
parameter	conditions/description	min	typ	max	units																																
ref storage	at relative humidity <80%			40	°C																																
reflow soldering ¹	see reflow profile	255	260	265	°C																																
parameter	conditions/description	min	typ	max	units																																
ref storage	5-25°C, 20-75% humidity																																				
reflow soldering	see reflow profile	255	260		°C																																

5. Tape and reel packaging differs

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE

Affected Date Code: **11/15/2022**

Product Availability: **Channel availability mid Q4**

Additional Information:

PCN Approval:

Operations/Quality

Product Management

11/16/2022